



Recorder/Controller Specification Sheet

- Secure data recording
- 2 PID control loops
- Dual programmer
- High accuracy universal inputs
- USB removable data storage facility
- Compact design
- 50MB flash memory
- Ethernet communications
- 1/4 VGA crystal clear display
- 30 virtual channels
- Steriliser Application Block
- Relative Humidity Application Block
- Multiple I/O options
- Cascade with auto-tune
- Multi-language support (French, German, Italian and Spanish)

The nanodac™ recorder/controller offers the ultimate in graphical recording combined with PID control for a box of its size. The compact 1/4 DIN panel mount unit offers four high accuracy universal inputs for data recording and PID control. This secure data recording device with accurate control is enhanced by a full colour, 1/4 VGA display to bring a crystal clear operator interface to even the smallest of machines.

Crystal clear, colour display

The 3.5" TFT display offers incredibly clear visualisation of process parameters with a wide selection of configurable views to best suit the application. Views include: Horizontal and vertical trends, Horizontal and vertical bar graphs, Numeric, Alarm panel, Alarm status, and control loops. The unit also provides user wiring from the front of the product for detailed configuration without the need to connect to a PC.

Data Acquisition and Recording

The nanodac recording functionality utilises the secure strategies and UHH format developed by Eurotherm through years of recording expertise. As well as multiple real-time views and historical review on the product, multiple data archiving strategies are provided utilising the 50MB onboard Flash memory, removable USB and data transfer via FTP to a specified server.

The four universal input channels provide high accuracy (suitable for use in Nadcap applications) and 125ms parallel sampling. An additional 30 virtual channels can be utilised to provide maths, counter, slave communications and totaliser functionality within the instrument.

PID Control Loops

The nanodac instrument can also provide up to three independent control loops (optional). This control functionality utilises the advanced Eurotherm PID algorithm providing high performance and reliability to your process. Functionality includes one of the best autotune facilities available along with overshoot inhibition (cutbacks); compensation for power fluctuations using power feedforward; linear, fan, oil and water cooling.

Heat Treatment is one of the many processes that often need to vary the set-point of the control process over a set period of time; this is achieved by using a set-point program. The nanodac offers an optional Dual Programmer supporting up to 100 programs locally, each program supporting 25 segments. The nanodac also provides remote access to a further 100 programs that can be easily retrieved via FTP or USB memory stick.

imagine bigger better smaller

Specification

General

I/O types	Analogue i/p: Four/eight Digital i/p: Two Digital (logic) o/p: Two max (see order code) Relay o/p: Four max (see order code) DC output: Three max (see order code)	Modbus TCP master/slave (optional) USB configuration save/restore User linearisation tables (four) Two control loops (optional) Zirconia probe support (optional) 30 Virtual channels (each configurable as counter, maths, totaliser or comms input) Steriliser (optional) Relative humidity (optional) Customised start up screen EtherNet/IP* client/server (optional)	Ethernet communications Type: 10/100baseT Ethernet (IEEE802.3) Protocols: Modbus TCP/IP master/slave, EtherNet/IP client/server Category 5 100metres (110 yards) RJ45. Green LED illuminated = link connected; Amber LED flashing shows link activity
Features:			

Environmental performance

Ambient temperature range	Operating: 0 to 55°C Storage: -20 to +70°C
Humidity range	Operating: 5% to 85% RH non condensing Storage: 5% to 85% RH non condensing
Protection	Front panel IP65 Front panel washdown: IP66, NEMA4X (International) Behind panel: IP10 (International)
Shock/Vibration:	To BS EN61131-2 (5 to 150 Hz. at 1g; 1 octave per min.)
Altitude:	<2000 metres
Atmosphere:	Not suitable for use in explosive or corrosive atmospheres
Electrical safety:	BS EN61010-1 (Installation category II; Pollution degree 2)
Electromagnetic compatibility	
Emissions (Standard units):	BS EN61326 Class B - Light industrial
(Low voltage option):	BS EN61326 Class A - Heavy industrial
Immunity:	BS EN61326 Industrial

Other approvals and compliance details

General:	CE and cUL, EN61010
PV input:	AMS2750D compliant
RoHS	EU; China

Packaging: BS61131-2 section 2.1.3.3.

Physical

Panel mounting:	1/4 DIN
Weight: Instrument only:	0.44kg (15.52ozs)
Panel cutout dimension:	92 mm x 92 mm (both -0.0 +0.8) or 3.62 in x 3.62 in (both -0.00 +0.03 in)
Depth behind panel:	90 mm (3.54 in) excluding wiring

Operator interface

Display:	3.5" TFT colour display (320 pixels wide x 240 pixels high)
Controls:	Four navigation pushbuttons below the display screen (Page, Scroll, Lower and Raise)

Power requirements

Supply voltage:	Standard: 100 to 230V ac ±15% at 48 to 62Hz Low voltage: 24V ac (+10% -15%) at 48 to 62Hz, or 24V dc (+20% -15%)
Power dissipation:	9W (max.)
Fuse type:	No internal fuse fitted
Interrupt protection:	Standard: Holdup >10ms at 85V RMS supply voltage Low voltage: Holdup >10ms at 20.4V RMS supply voltage

Battery backup

Stored data:	Time, date
Replacement period:	Three years typical
Clock (real-time clock) data:	
Support time:	Minimum of 1 year with unit unpowered
Temperature stability:	0 to 55°C ±3.5ppm
RTC Aging:	First year to 10 year <± 5ppm Poly-carbonmonofluoride/lithium (BR2330) (PA260195)
Type:	Replace battery with Panasonic BR2330/BE only. Use of another battery may present a risk of fire or explosion. See owners manual for safety instructions.

Caution Battery may explode if mistreated. Do not recharge, disassemble or dispose of in fire.

Ethernet communications

Type:	10/100baseT Ethernet (IEEE802.3)
Protocols:	Modbus TCP/IP master/slave, EtherNet/IP client/server
Cable type:	Ethernet Category 5
Maximum length:	100metres (110 yards)
Termination:	RJ45. Green LED illuminated = link connected; Amber LED flashing shows link activity

USB port

Number of ports:	One at rear of instrument
Standard:	USB1.1
Transmission speeds:	1.5MBit/sec (low speed device)
Maximum current:	<100mA
Peripherals supported:	Memory stick (8GB max), Bar code reader, QWERTY keyboard

Update/Archive rates

Sample rate (input/output):	8Hz
Trend update:	8Hz max.
Archive sample value:	Latest value at archive time
Display value:	Latest value at display update time

Analogue Input

General

Number of Inputs:	Four/eight
Input types:	dc Volts, dc mV, dc mA, dual mA (external shunt required), dual mV, dual TCF, Thermocouple, RTD (2-wire and 3-wire), Digital (Contact closure)
Input type mix:	Freely configurable
Sample rate:	8Hz (125ms)
Conversion method:	4Hz (250ms) if dual input enabled
Input ranges:	16 bit delta sigma
Mains rejection (48 to 62Hz)	See Table 1 and Table 2
Series mode:	> 95dB
Common mode voltage:	> 179dB
Series mode voltage:	250V ac max.
Input Impedance:	280mV at lowest range; 5V peak to peak at highest range
Overvoltage protection	40mV, 80mV, 2V ranges > 100MΩ; 62.5kΩ for input voltages > 5.6V 667kΩ for input ranges < 5.6V

Continuous:	±30V RMS
Transient (<1ms):	±200V pk-pk between terminals
Sensor break detection	Type: ac sensor break on each input giving quick response with no associated dc errors
Recognition time:	<3 seconds
Minimum break resistance:	40mV, 80mV ranges: 5kΩ; other ranges: 12.5kΩ
Shunt (mA inputs only):	1Ω to 1kΩ mounted externally
additional error due to shunt:	0.1% of Input
Isolation:	Channel to Channel: 300V RMS or dc (Double insulation) Note: If Dual Channel mode enabled primary and secondary inputs are not electrically isolated from each other.
Channel to common electronics:	300V RMS or dc (Double insulation)
Channel to ground:	300V RMS or dc (Double insulation)
Dielectric strength	Test: BS EN61010, 1 minute type test
Channel to Channel:	2500V ac
Channel to Ground:	1500V ac

Low Range	High Range	Resolution	Maximum error (Instrument at 25°C)	Temperature Performance
-40mV	40mV	1.9µV	4.6µV + 0.053% of reading	13ppm of input per °C
-80mV	80mV	3.2µV	7.5µV + 0.052% of reading	13ppm of input per °C
-2V	2V	82µV	420µV + 0.044% of reading	13ppm of input per °C
-3V	10V	500µV	1.5mV + 0.063% of reading	45ppm of input per °C

Table 1 Voltage input ranges

Note: Restricted to 2000mV if dual input mode enabled

Resistance input ranges

Temperature scale:	ITS90
Types, ranges and accuracies:	See Table 3
Maximum source current:	200µA
Pt100 figures	Range: 0 to 400Ω (-200 to +850°C)
Resolution:	0.05°C
Calibration error:	±0.31°C ±0.023% of measurement in °C at 25°C ambient

Temperaure coefficient: $\pm 0.01^\circ\text{C}/^\circ\text{C} \pm 25\text{ppm}/^\circ\text{C}$ measurement in $^\circ\text{C}$ from 25°C ambient
 Measurement noise: 0.05°C peak-peak with 1.6s input filter
 Linearity error: 0.0033% (best fit straight line)
 Lead resistance: 0 to 22Ω matched lead resistances
 Bulb current: $200\mu\text{A}$ nominal

Low Range	High Range	Resolution	Maximum error (Instrument at 25°C)	Temperature Performance
0Ω	400Ω	20mΩ	120mΩ + 0.023% of reading	25ppm of input per $^\circ\text{C}$

Table 2 Ohms (RTD) input ranges

RTD Type	Overall range ($^\circ\text{C}$)	Standard	Max. linearisation error
Cu10	-20 to +400	General Electric Co.	0.02°C
Cu53	-70 to +200	RC21-4-1966	0.01°C
JPT100	-220 to +630	JIS C1604:1989	0.01°C
Ni100	-60 to + 250	DIN43760:1987	0.01°C
Ni120	-50 to +170	DIN43760:1987	0.01°C
Pt100	-200 to + 850	IEC751	0.01°C
Pt100A	-200 to + 600	Eurotherm Recorders SA	0.09°C

Table 3 RTD type details

Thermocouple data

Temperature scale: ITS90
 CJC Types: Off, internal, external, remote.
 Remote CJC source: Any input channel
 Internal CJC error: $<1^\circ\text{C}$ max., with instrument at 25°C
 Internal CJC rejection ratio: 40:1 from 25°C
 Upscale/downscale drive: High, low or none independently configurable for each channel's sensor break detection
 Types, ranges and accuracies: See Table 4

T/C Type	Overall range ($^\circ\text{C}$)	Standard	Max. linearisation error
B	0 to +1820	IEC584.1	0 to 400°C = 1.7°C 400 to 1820°C = 0.03°C
C	0 to +2300	Hoskins	0.12°C
D	0 to +2495	Hoskins	0.08°C
E	-270 to +1000	IEC584.1	0.03°C
G2	0 to + 2315	Hoskins	0.07°C
J	-210 to +1200	IEC584.1	0.02°C
K	-270 to +1372	IEC584.1	0.04°C
L	-200 to +900	DIN43710:1985 (to IPTS68)	0.02°C
N	-270 to +1300	IEC584.1	0.04°C
R	-50 to +1768	IEC584.1	0.04°C
S	-50 to +1768	IEC584.1	0.04°C
T	-270 to +400	IEC584.1	0.02°C
U	-200 to + 600	DIN43710:1985	0.08°C
NiMo/NiCo	-50 to + 1410	ASTM E1751-95	0.06°C
Platinel	0 to + 1370	Engelhard	0.02°C
Mi/NiMo	0 to + 1406	Ipsen	0.14°C
Pt20%Rh/Pt40%Rh	0 to + 1888	ASTM E1751-95	0.07°C

Table 4 Thermocouple types, ranges and accuracies

Relay and Logic I/O

O/P1, O/P2 and O/P3 logic I/O and relay specification

Active (current on) current sourcing logic output (O/P1 or O/P2 only)

Voltage o/p across terminals: +11V min.; +13V max.
 Short circuit output current: 6mA min. (steady state); 44mA max. (switch current)

Inactive (current off) current sourcing logic output (O/P1 or O/P2 only)

Voltage output across terminals: 0V (min.); 300mV (max.)

Output source leakage current into short circuit: 0μA (min.); 100μA (max.)

Active (current on) contact closure sourcing logic input (O/P1 only)

Input current Input at 12V: 0mA (min.); 44mA (max.)
 Input at 0V: 6mA min. (steady state); 44mA max. (switch current)

Open circuit input voltage: 11V (min.); 13V (max.)

Open circuit (inactive) resistance: 500Ω (min.); ∞ (max.)

Closed circuit (active) resistance: 0Ω (min.); 150Ω (max.)

Relay Contacts

Contact switching power (resistive):

Max. 2A at 230V RMS $\pm 15\%$

Min. 100mA at 12V

2A

Digital Inputs

Dig InA and Dig InB contact closure logic input

Contact closure

Short circuit sensing current (source): 5.5mA (min.); 6.5mA (max.)
 Open circuit (inactive) resistance: 600Ω (min.); ∞ (max.)
 Closed circuit (active) resistance: 0Ω (min.); 300Ω (max.)

DC Output (option)

O/P1, O/P2, O/P3 DC analogue outputs

Current outputs (O/P1, O/P2 and O/P3)

Output ranges: Configurable within 0 to 20mA
 Load resistance: 500Ω max.
 Calibration accuracy: $<\pm 100\mu\text{A} \pm 1\%$ of reading

Voltage outputs (O/P3 only)

Output ranges: Configurable within 0-10V
 Load resistance: 500Ω min.
 Calibration accuracy: $<\pm 50\text{mV} \pm 1\%$ of reading

General

Isolation: 300V ac double insulated from instrument and other I/O

Resolution: >11 bits


Thermal drift: <100ppm/ $^\circ\text{C}$

* Consult Factory

† Refer to Manual




Rear Terminals

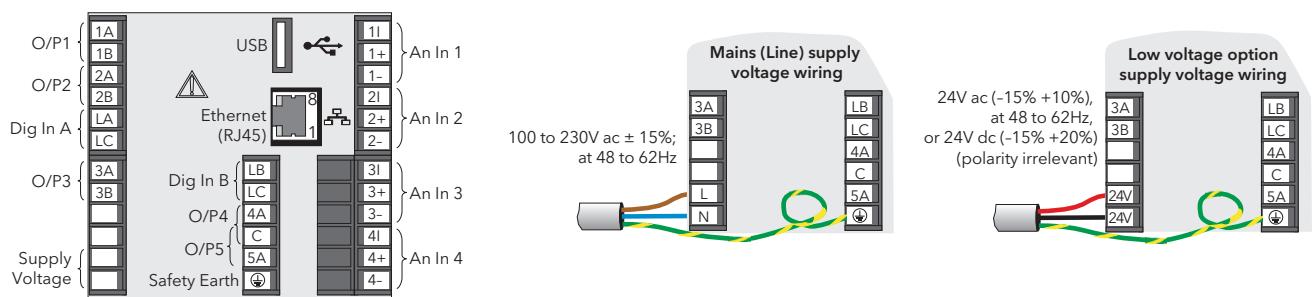


Termination details

The screw terminals accept wire sizes in the range:
Single wire 0.205 to 2.08mm² (14 to 24 AWG) 2 wires 0.205 to 1.31mm² (16 to 24 AWG) inclusive.
Screw terminals should be tightened to a torque not exceeding 0.4Nm (3.54 lb in).

O/P1			
Contact closure	Logic O/P (active high)	Relay output	Isolated DC O/P (mA)
O/P2			
Isolated DC O/P (mA)	Logic O/P (active high)	Relay output	
O/P3			
Relay output	Isolated DC O/P (mA / V)	Contact closure	Contact closure
			O/P4; O/P5
			Relay output
An In1; An In2; An In3; An In4		Dual An In1 to An In4	
T/C, Volts, millivolts	Millamps	RTD (three wire)	RTD (two wire)
			Ohms inputs
			Digital
			mV/TC
			mA

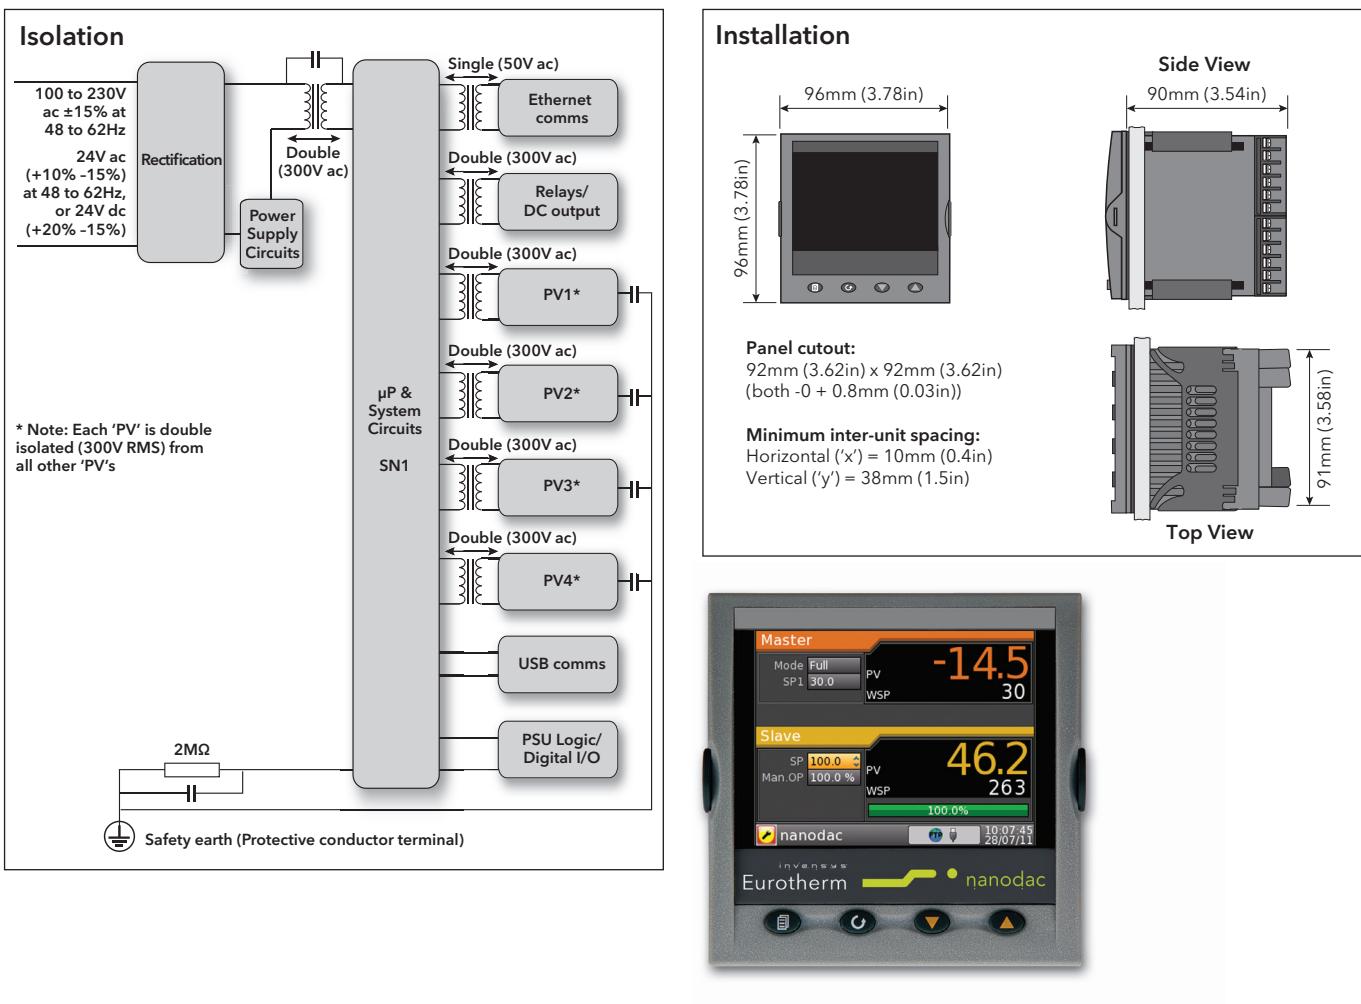

Order codes

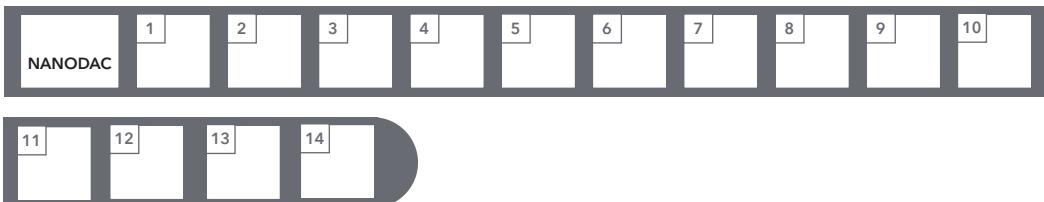

Basic Product		3 Programmer		6 Communications Protocol		10 OEM Security	
NANODAC		X	None (default)	TS	Modbus TCP/IP slave (default)	XXX	None
Graphical Recorder/Controller		P	Dual programmer	TM	Modbus TCP/IP master	OEM	OEM Security enabled
1 Supply Voltage	VH	100-230V ac ±15% at 48-62Hz	LRR	Logic/Relay/Relay (default)	ES	EtherNet/IP® client/server	
	VL	24V ac (+10% -15%) at 48-62Hz, or 24V dc (+20% -15%)	LRD	Logic/Relay/Iso DC output	TE	Modbus TCP Master and Ethernet/IP*	
2 Controller	XX	None (default)	LLR	Logic/Logic/Relay			
	C	2 Control loops	RDD	Relay/Iso DC/Iso DC			
	A	Advanced control loop (includes 2 control loops)	DDD	Iso DC/Iso DC/Iso DC			
4 Output Options 1-2-3		5 Application Blocks		7 Bezel		11 Labels	
VH		LRR	None	SV	Silver (standard)	XXXXX	No custom labels
VL		LRD	Zirconia	WD	Wash down front*		
XX		LLR	Humidity				
C		RDD	Steriliser				
A		DDD		* Consult Factory			
8 Toolkit Blocks		9 Operating Language		12 Special		13 Dual Input Channels	
XX		XXX	English (default)	XX	None	XX	None
05		BASIC	French	05	5 inputs enabled	05	5 inputs enabled
06			German	06	6 inputs enabled	06	6 inputs enabled
07			Italian	07	7 inputs enabled	07	7 inputs enabled
08			Spanish	08	8 inputs enabled	08	8 inputs enabled
14 Dual Thermocouple Support		10 Operating Language		11 Labels		12 Special	
XX		ENG	English (default)	XXXXX	No custom labels	XX	None
TC		FRA	French			TC	Dual T/C support enabled
		GER	German				
		ITA	Italian				
		SPA	Spanish				

Eurotherm: International sales and service

www.eurotherm.com

AUSTRALIA Melbourne
T (+61 0) 8562 9800
E info.eurotherm.au@invensys.com

AUSTRIA Vienna
T (+43 1) 7987601
E info.eurotherm.at@invensys.com

BELGIUM & LUXEMBOURG Moha
T (+32) 85 274080
E info.eurotherm.be@invensys.com

BRAZIL Campinas-SP
T (+5519) 3707 5333
E info.eurotherm.br@invensys.com

CHINA
T (+86 21) 61451188
E info.eurotherm.cn@invensys.com
Beijing Office
T (+86 10) 5909 5700
E info.eurotherm.cn@invensys.com

FRANCE Lyon
T (+33 478) 664500
E info.eurotherm.fr@invensys.com

GERMANY Limburg
T (+49 6431) 2980
E info.eurotherm.de@invensys.com

INDIA Mumbai
T (+91 22) 67579800
E info.eurotherm.in@invensys.com

IRELAND Dublin
T (+353 1) 4691800
E info.eurotherm.ie@invensys.com

ITALY Como
T (+39 031) 975111
E info.eurotherm.it@invensys.com

KOREA Seoul
T (+82 2) 2090 0900
E info.eurotherm.kr@invensys.com

NETHERLANDS Alphen a/d Rijn
T (+31 172) 411752
E info.eurotherm.nl@invensys.com

POLAND Katowice
T (+48 32) 78395000
E info.eurotherm.pl@invensys.com
Warsaw
T (+48 22) 8556010
E biuro@invensys-systems.pl

SPAIN Madrid
T (+34 91) 6616001
E info.eurotherm.es@invensys.com

SWEDEN Malmo
T (+46 40) 384500
E info.eurotherm.se@invensys.com

SWITZERLAND Wollerau
T (+41 44) 7871040
E info.eurotherm.ch@invensys.com

UAE DUBAI
T (+971 4) 8074700
E marketing.mena@invensys.com

UNITED KINGDOM Worthing
T (+44 1903) 268500
E info.eurotherm.uk@invensys.com

U.S.A. Ashburn VA
T (+1 703) 724 7300
E info.eurotherm.us@invensys.com

ED66

© Copyright Eurotherm Limited 2011

Invensys, Eurotherm, the Eurotherm logo, Chessell, EurothermSuite, Mini8, Eyon, Eyris, EPower nodac, Foxboro and Wonderware are trademarks of Invensys plc, its subsidiaries and affiliates. All other brands may be trademarks of their respective owners.

All rights are strictly reserved. No part of this document may be reproduced, modified, or transmitted in any form by any means, nor may it be stored in a retrieval system other than for the purpose to act as an aid in operating the equipment to which the document relates, without the prior written permission of Eurotherm limited.

Eurotherm Limited pursues a policy of continuous development and product improvement. The specifications in this document may therefore be changed without notice. The information in this document is given in good faith, but is intended for guidance only.

Eurotherm Limited will accept no responsibility for any losses arising from errors in this document.